


SHOWER RAIL

Available from
www.byretech.com

C Shape Rail Installation.

Tools required to complete the installation.

- Electric Drill with 8mm masonry drill bit
- Suitable Hex Screwdriver
- Masking tape to ensure tiles are not damaged when drilling
- Stainless Steel Pipe cutter or suitable hacksaw
- Spirit level to get rail level
- Tape measure

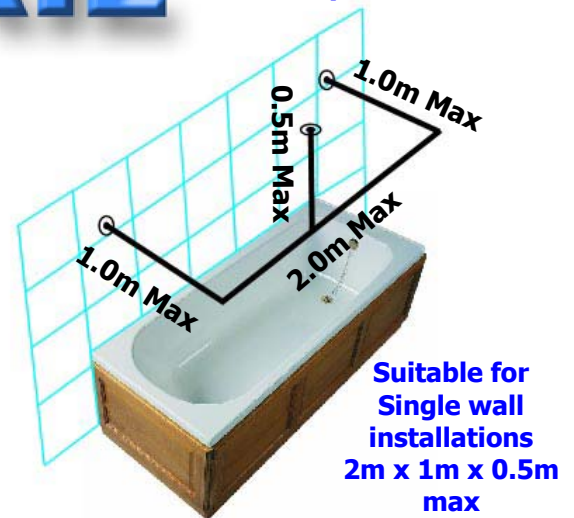

Installation instructions


- Measure up from the **inside base of the bath approximately 190 cm** and make a horizontal line where you would like bracket **"a"** to be positioned.

(This is so the rail and new curtain fit perfectly, as shower curtains are normally 180cm drop from shower rail)

- Decide on the desired length and width of your shower rail and using a pipe cutter or hacksaw cut the stainless steel rails to size. (**Tip - Rails should be slightly shorter than the length and width of your bath**)

- Push the "T" piece onto the long tube at this stage.

- Clean the inside of the tubes and also the elbow piece with a **clean cloth**. **Note - Take Care there may be sharp metal exposed at the ends.** Take the metal glue and add a moderate amount to the **inside of each tube**. Push the tube ends over the elbow and leave to set for 10 minutes. Leave on a flat surface to for the glue to dry.



- Hold the "C" shaped rail up against the wall as per Diagram 1 and mark the position of the point where the cut tubes touch the wall on your newly marked horizontal line with a pencil **"a"**. **Note. You will need an 8mm masonry drill bit to go through your wall tiles**

- Fix masking tape to the area where you will fix the first bracket **"a"**. Carefully mark and drill the three holes, then add the rawplugs and fix bracket **"a"** to wall.

- Insert assembled rail into the wall bracket **"a"** then check that the rail is level using a spirit level and mark position of the second bracket **"b"**.

- Carefully mask the area off, then drill the holes and add the rawplugs at position **"b"**.

- Slide C shape rail into both brackets, measure required length of vertical rail and cut to length. Slide vertical rail into T piece and slide bracket onto vertical rail. Mark position of ceiling fixings and remove rail from wall. Drill and rawplug. **(Note. You may need extra bracing in your ceiling space to screw into)**

- Reassemble the rail onto the wall / ceiling and fix using screws provided.

- Tighten all allen screws on all brackets and "T" piece with the allen key provided to finish your installation.

- 1.9m approx height from bottom of bath to shower rail



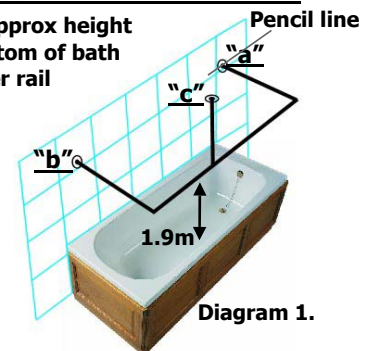


Diagram 1.

- Tape up area with masking tape
- Mark & drill holes using an 8mm masonry drill
- Add rawplugs & fix bracket to tiled wall

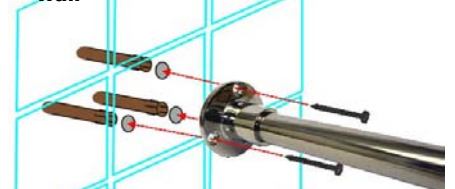

- Ensure rod is level and straight
- Mark new bracket and repeat above procedure then fix rail in place

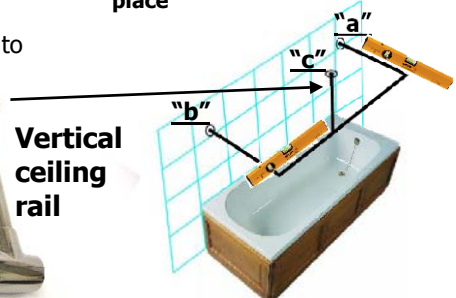

Byretech Ltd
The Bathroom Water Damage Prevention specialists

Byretech Ltd
Unit 51 Padgets Lane, South Moons Moat,
Redditch, Worcestershire B98 0RD UK.
Phone: +44 (0) 1527 522 522 Fax: +44 (0) 1527 522 111
E-mail: info@byretech.com Web: www.byretech.com