


# SHOWER RAIL

Available from  
[www.byretech.com](http://www.byretech.com)

## U Shape 1m Rail Installation.

### Tools required to complete the installation.

- Electric Drill with 8mm masonry drill bit
- Suitable Hex Screwdriver
- Masking tape to ensure tiles are not damaged when drilling
- Stainless Steel Pipe cutter or suitable hacksaw
- Spirit level to get rail level
- Tape measure

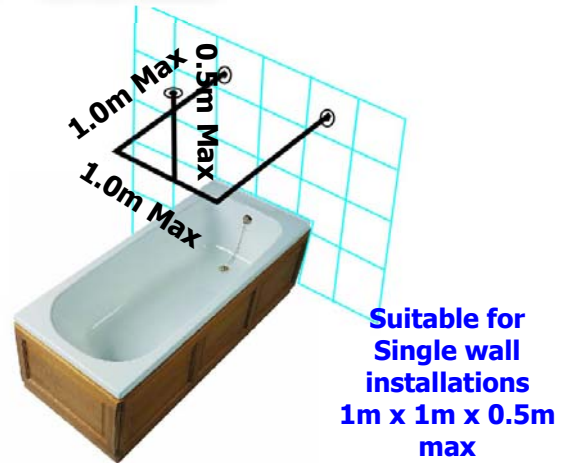

## Installation instructions

- Measure up from the **inside base of the bath approximately 190 cm** and make a horizontal line where you would like bracket "a" & "c" to be positioned.

(This is so the rail and new curtain fit perfectly, as shower curtains are normally 180cm drop from shower rail)

- Decide on the desired length and width of your shower rail and using a pipe cutter or hacksaw cut the stainless steel rails to size. (Tip - Rails should be slightly shorter than the length and width of your bath)

- Push the "T" piece onto the 1m long tube at this stage "d".

- Clean the inside of the tubes and also the elbow piece with a clean cloth. **Note - Take Care there may be sharp metal exposed at the ends.** Take the metal glue and add a moderate amount to the inside of each tube. Push the tube ends over the elbow and leave to set for 10 minutes. **Note - Leave on a flat surface to for the glue to dry.**



- Hold the "U" shaped rail up against the wall as per Diagram 1 and mark the position of the point where the cut tubes touch the wall on your newly marked horizontal line with a pencil "a" & "c".

**Note. You will need an 8mm masonry drill bit to go through your wall tiles**


- Fix masking tape to the area where you will fix the brackets "a" & "c". Carefully mark and drill the six holes for the brackets, then add the rawplugs and fix brackets "a" & "c" to wall.

- Insert assembled rail into the wall bracket "a" & "c" then check that the rail is level using a spirit level. Now measure the vertical ceiling support height required and cut the 0.5m tube to length. Remove rail from wall brackets.


- Slide U shape rail into both brackets again and now slide vertical rail into T piece and slide final mounting bracket onto vertical rail as shown on picture below. Mark position of ceiling fixings and remove rail from wall. Drill and rawplug. (Note. You may need extra bracing in your ceiling space to screw into)

- Reassemble the rail onto the wall / ceiling and fix using screws provided.


- Tighten all allen screws on all brackets and "T" piece with the allen key provided to finish your installation.

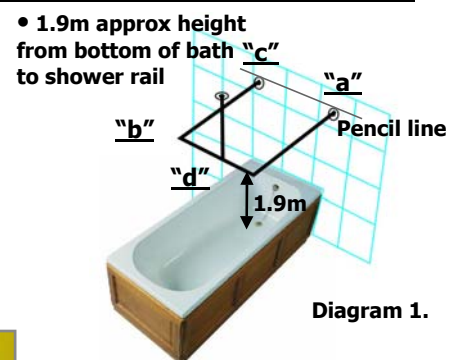

- Tape up area with masking tape
- Mark & drill holes using an 8mm masonry drill
- Add rawplugs & fix bracket to tiled wall

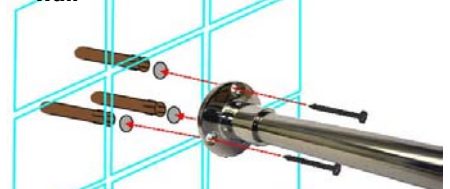

- Ensure rod is level and straight
- Mark new bracket and repeat above procedure then fix rail in place

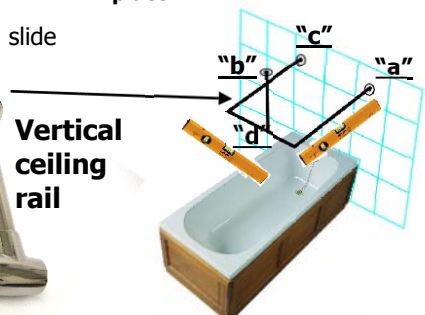

**Byretech Ltd**  
The Bathroom Water Damage Prevention specialists

Byretech Ltd  
Unit 51 Padgets Lane, South Moons Moat,  
Redditch, Worcestershire B98 0RD UK.  
Phone: +44 (0) 1527 522 522 Fax: +44 (0) 1527 522 111  
E-mail: [info@byretech.com](mailto:info@byretech.com) Web: [www.byretech.com](http://www.byretech.com)