

# SHOWER RAIL

Available from  
[www.byrettech.com](http://www.byrettech.com)

## Crescent Rod to Wall Rail Installation.

### Tools required to complete the installation.

Electric Drill with 8 mm masonry drill bit 


Suitable Hex Screwdriver 

Masking tape to ensure tiles are not damaged when drilling

Stainless Steel Pipe cutter or suitable hacksaw

Spirit level to get rail level

Tape measure 

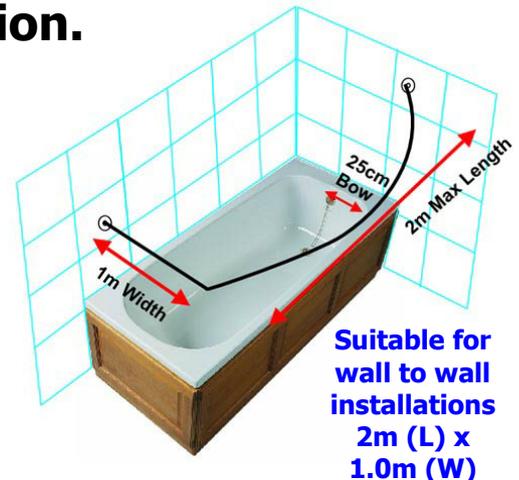

## Installation instructions

Measure up from the **inside base of the bath approximately 190 cm** and make a horizontal line where you would like bracket **"a"** to be positioned.

**(This is so the rail and new curtain fit perfectly, as shower curtains are normally 180cm drop from shower rail)**

Decide on the desired length and width of your shower rail and using a pipe cutter or hacksaw cut the stainless steel rail to size. **( Tip - Rails should be slightly shorter than the length and width of your bath )**

Clean 2cm inside of the tubes and also the swivel joint with a **clean cloth. Note - Take Care there may be sharp metal exposed at the ends.** Test the swivel joint fits into the tubes before adding glue. Add a few drops to the **inside of each tube.** Push swivel joint into the Crescent Rod and straight Rod making sure the Rod is on a **flat surface** when the glue sets. **(VERY IMPORTANT)**




Hold the Crescent Rod up against the two walls as per Diagram 1 and mark the position of the point where the long tube touches the wall on your newly marked horizontal line with a pencil **"a"**. Normally you would site the bracket **10cm** inside the edge of your bath. **Note. You will need an 8mm masonry drill bit to go through your tiles**

Fix masking tape to the area where you will fix the first bracket **"a"**. Carefully mark and drill the two holes, then add the rawplugs and fix bracket **"a"** to wall.

Insert assembled rail into the wall bracket **"a"** then check that the rail is level using a spirit level and mark position of the second bracket **"b"**. Carefully mask the area off, then drill the 6mm holes and add the rawplugs and base plate.

Slide Crescent Rod into bracket **"a"**. Slide straight rail into bracket **"b"** and fix to wall.


Tighten all of the allen screws on all brackets with the allen keys provided to finish your installation.

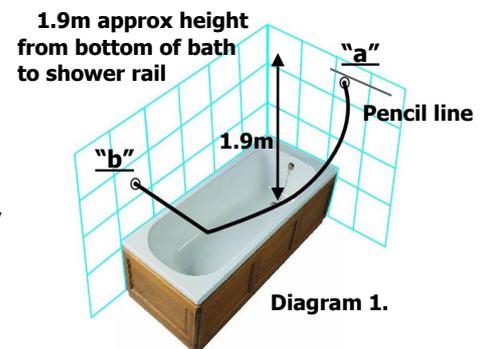

Tape up area with masking tape  
Mark & drill holes using an 6mm masonry drill walls  
Add rawplugs & fix bracket to tiled wall



Ensure rod is level and straight  
Mark new bracket **"b"** and repeat above procedure then fix rail in place

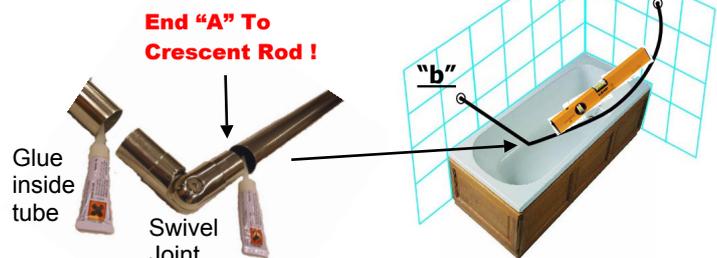

Byrettech Ltd  
The Bathroom Water Damage Prevention specialists

Byrettech Ltd  
Unit 51 Padgets Lane, South Moons Moat,  
Redditch, Worcestershire B98 0RD UK.  
Phone: +44 (0) 1527 522 522 Fax: +44 (0) 1527 522 111  
E-mail: [info@byrettech.com](mailto:info@byrettech.com) Web: [www.byrettech.com](http://www.byrettech.com)